
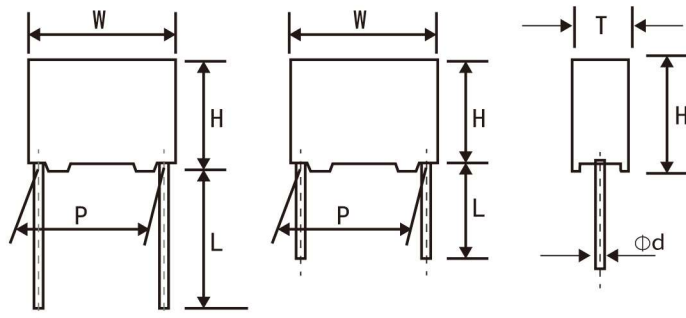


MPX

CBB62

金属化聚丙烯膜抑制干扰用固定电容器(X2类别)

Metallized Polypropylene Film Interference Suppression capacitor(Class X2)

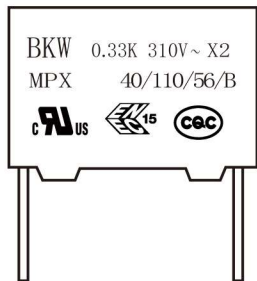

● 安全认证 Safety Approvals

■		CQC (中国)	IEC60384-14:2013+AMD1:2016, 证书号 (Certificate No.): CQC24001434015
■		ENEC-DEMKO (欧盟)	EN IEC 60384-14:2023, 证书号 (Certificate No.): ENEC-04959
■		•UL/CUL (美国/加拿大)	UL 60384-14, CAN/CSA-E60384-14, 证书号 (Certificate No.): E542153

● 技术要求 Specifications

气候类别/阻燃等级 Climatic Category/Passive Flammability Category		40/110/56/B
工作温度范围 Operating Temperature Range		- 40°C~+110°C
额定电压 Rated Voltage(U_R)		310Vac, 50Hz/60Hz
最大额定电源电压 Max rated supply mains voltage		250Vac, 50Hz/60Hz
电容量范围 Capacitance Range		0.001 μ F ~ 10 μ F
电容量偏差 Capacitance Tolerance		$\pm 10\%$ (K), $\pm 20\%$ (M)
耐电压 Voltage Proof	引线之间 Between Terminals:	4.3 U_R (Vdc), 2s
	极壳之间 Between Terminals To Case:	1500+2 U_R Vac, 1min
损耗角正切 Dissipation Factor($\tan \delta$)		$\leq 0.1\%$ (1KHZ at 20~25°C)
绝缘电阻 Insulation Resistance	$\geq 15000M\Omega, C_N \leq 0.33\mu F$	(20°C, 100V, 1min)
	$RC_N \geq 5000s, C_N > 0.33\mu F$	

MPX

CBB62

外形尺寸Dimensions(mm)

C _R (μF)	W (±1)	H (±1)	T (±1)	P (±1)	DΦ (±0.05)
0.001	10	9	4	7.5	0.5
0.0022	10	9	4	7.5	0.5
0.0033	10	9	4	7.5	0.5
0.0047	10	9	4	7.5	0.5
0.0068	10	9	4	7.5	0.5
0.01	10	9	4	7.5	0.5
0.015	10	9	4	7.5	0.5
0.018	10	9	4	7.5	0.5
0.022	10	9	4	7.5	0.5
0.033	10	11	5	7.5	0.5
0.001	13	9	4	10	0.5
0.0022	13	9	4	10	0.5
0.0033	13	9	4	10	0.5
0.0047	13	9	4	10	0.5
0.0068	13	9	4	10	0.5
0.01	13	9	4	10	0.6
0.022	13	9	4	10	0.6
0.033	13	11	5	10	0.6
0.1	13	11	5	10	0.6
0.1	13	12	6	10	0.6
0.15	13	12	6	10	0.6
0.22	13	14	8	10	0.6
0.22	13	16	8	10	0.6
0.33	13	16	8	10	0.6
0.47	13	19	9	10	0.6
0.68	13	21	11	10	0.6
0.1	18	11	5	15	0.6
0.1	18	12	6	15	0.6
0.22	18	12	6	15	0.6
0.22	18	13.5	7.5	15	0.6
0.33	18	13	7	15	0.8
0.33	18	14.5	8.5	15	0.8
0.47	18	14.5	8.5	15	0.8
0.47	18	17.5	10	15	0.8
0.56	18	19	11	15	0.8
0.68	18	16	10	15	0.8
0.68	18	19	11	15	0.8

C _R (μF)	W (±1)	H (±1)	T (±1)	P (±1)	DΦ (±0.05)
0.22	26.5	15	6	22.5	0.6
0.22	26.5	16.5	7	22.5	0.8
0.33	26.5	16.5	7	22.5	0.8
0.33	26.5	17	8.5	22.5	0.8
0.47	26.5	17	8.5	22.5	0.8
0.47	26.5	19	10	22.5	0.8
0.68	26.5	19	10	22.5	0.8
1.0	26	20	11	22.5	0.8
1.2	26	22	12	22.5	0.8
1.5	26	22	12	22.5	0.8
0.68	31.5	19.5	11	27.5	0.8
0.82	31.5	19.5	11	27.5	0.8
1.0	31.5	19.5	11	27.5	0.8
1.0	31.5	22	13	27.5	0.8
1.2	31.5	19.5	11	27.5	0.8
1.2	31.5	22	13	27.5	0.8
1.2	31.5	25	14	27.5	0.8
1.5	31.5	22	13	27.5	0.8
1.5	31.5	25	14	27.5	0.8
1.5	31.5	25.5	16	27.5	0.8
1.5	31.5	26	18	27.5	0.8
1.8	31.5	26	18	27.5	0.8
2.2	31.5	28	18	27.5	0.8
2.7	31.5	28	18	27.5	0.8
3.3	31.5	28	18	27.5	0.8
4.4	31	31	22	27.5	0.8
4.7	32	37	22	27.5	0.8
5.6	32	37	22	27.5	0.8
2.2	38	30	20	31.5	0.8
3.3	35.5	31	20	31.5	0.8
4.7	42	37	22	37.5	1.0
6.8	42	37	22	37.5	1.0
8.2	42	41	27.5	37.5	1.0
10.0	42	45	30	37.5	1.0
6.8	57	50	30	52.5	1.0
8.2	57	50	35	52.5	1.0
10.0	57	50	40	52.5	1.0